



NRL/MR/6795--97-7954

# Electron Trapping in Self-Modulated Laser Wakefields by Raman Backscatter

C.I. MOORE

*National Research Council/Naval Research Laboratory Research Associate*

A. TING  
E. ESAREY  
R.F. HUBBARD  
H.R. BURRIS  
P. SPRANGLE

*Beam Physics Branch  
Plasma Physics Division*

K. KRUSHELNICK

*Laboratory of Plasma Studies, Cornell University  
Ithaca, New York*

B. HAFIZI

*ICARUS Research, Inc.  
Bethesda, Maryland*

C. MANKA

*Research Support Instruments, Inc.  
Alexandria, Virginia*

19970905 121

August 31, 1997

Approved for public release; distribution unlimited.

REPORT DOCUMENTATION PAGE			Form Approved OMB No. 0704-0188	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave Blank)		2. REPORT DATE <u>August 31, 1997</u>		3. REPORT TYPE AND DATES COVERED
4. TITLE AND SUBTITLE  Electron Trapping in Self-Modulated Laser Wakefields by Raman Backscatter			5. FUNDING NUMBERS  JO# 67-5778-0-7	
6. AUTHOR(S)  C.I. Moore, <sup>1</sup> A. Ting, K. Krushelnick, <sup>2</sup> E. Esarey, R.F. Hubbard, B. Hafizi, <sup>3</sup> H.R. Burris, C. Manka, <sup>4</sup> and P. Sprangle				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES)  Naval Research Laboratory Washington, DC 20375-5320			8. PERFORMING ORGANIZATION REPORT NUMBER  NRL/MR/6795--97-7954	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES)  Office of Naval Research      Department of Energy Arlington, VA 22217-5660      Washington, DC 20585			10. SPONSORING/MONITORING AGENCY REPORT NUMBER	
11. SUPPLEMENTARY NOTES  <sup>1</sup> National Research Council/Naval Research Laboratory Research Associate <sup>2</sup> Laboratory of Plasma Studies, Cornell University, Ithaca, NY 14853 <sup>3</sup> ICARUS Research, Inc., Bethesda, MD 20824-0780 <sup>4</sup> Research Support Instruments Inc., Alexandria, VA 22314				
12a. DISTRIBUTION/AVAILABILITY STATEMENT  Approved for public release; distribution unlimited.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words)  Simultaneous measurements of high energy electrons and plasma wave characteristics have been conducted in a self-modulated laser wakefield accelerator. Approximately $10^8$ electrons were accelerated from the background plasma to energies greater than 1 MeV with a peak energy of approximately 30 MeV. A strong correlation between the plasma wave amplitude and electron production was measured with no evidence of wave breaking. Simulations indicate plasma electrons are trapped by the low phase velocity beat waves produced by backward Raman scattering.				
14. SUBJECT TERMS  Laser wakefield acceleration High energy electrons Raman instability			15. NUMBER OF PAGES  15	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT  UNCLASSIFIED	18. SECURITY CLASSIFICATION OF THIS PAGE  UNCLASSIFIED	19. SECURITY CLASSIFICATION OF ABSTRACT  UNCLASSIFIED	20. LIMITATION OF ABSTRACT  UL	

# ELECTRON TRAPPING IN SELF-MODULATED LASER WAKEFIELDS BY RAMAN BACKSCATTER

Conventional particle acceleration techniques are approaching fundamental limits to the accelerating fields due to material breakdown thresholds. New “structureless” techniques are now being investigated to overcome breakdown limitations [1]. Some of these techniques are vacuum laser accelerators [2], plasma beat-wave accelerators [3,4], and laser wakefield accelerators [3,5]. We are currently investigating the self-modulated laser wakefield accelerator (SM-LWFA) concept [6-10], in which a high power laser with a pulse length much longer than the plasma period,  $2\pi/\omega_p$  - where  $\omega_p$  is the plasma frequency, is tightly focused in a plasma. A self-modulation instability, caused by relativistic self-focusing (RSF) and the forward stimulated Raman scattering (SRS) instability, breaks the laser pulse into beamlets of length  $2\pi/\omega_p$  [10] which resonantly drive a large amplitude wakefield plasma wave. The plasma wave has a phase velocity  $v_p$  near the speed of light,  $c$ , and is well suited for high energy particle acceleration. RSF occurs when the laser power exceeds a critical power,  $P_{RSF} = 17 \left( \omega_0 / \omega_p \right)^2 \text{ GW}$ , where  $\omega_0$  is the laser frequency. The RSF threshold can be achieved with current laser technology in relatively high-density plasmas ( $n_0 \sim 10^{19} \text{ cm}^{-3}$ ,  $P_{RSF} \sim 2 \text{ TW}$ ). High density plasmas can support large accelerating fields ( $\sim 100 \text{ GV/m}$ ) before the onset of wave breaking. One-dimensional (1-D) cold fluid theory [11] indicates that wave breaking occurs at an electric field amplitude of  $E_{WB} = \sqrt{2(\gamma_p - 1)} E_0$ , where  $\gamma_p = 1 / \sqrt{1 - v_p^2 / c^2}$  and  $E_0 = mc\omega_p / e \approx 96 \sqrt{n_0 [\text{cm}^{-3}]} \text{ V/m}$ . Typically,  $\gamma_p \approx \omega_0 / \omega_p$ , *e.g.*,  $\gamma_p \sim 10$  and  $E_0 \sim 300 \text{ GV/m}$  for  $n_0 \sim 10^{19} \text{ cm}^{-3}$ .

Recent experiments have demonstrated electron acceleration in the SM-LWFA regime [7,8]. Experiments at Rutherford Appleton Laboratory [8] have achieved background plasma electron acceleration up to energies of 100 MeV using a laser power of 25 TW. The production of high energy electrons was observed to correlate with a spectral broadening of the forward SRS

radiation. This broadening was attributed to the destruction of plasma wave coherence due to wave breaking. Wave breaking was used as the explanation for the trapping and acceleration of background electrons by the plasma wave to the high energies observed.

The experiment at the Naval Research Laboratory (NRL) was also conducted in the SM-LWFA regime. However, much lower laser power was used (2.5 TW) and no evidence of wave breaking was apparent although high energy electrons (up to 30 MeV) were observed. The experiment used the laser pulse from the NRL chirped pulse amplification laser system focused in a supersonic helium gas jet to generate large amplitude plasma waves. The 1054 nm laser pulse had a typical peak power of 2.5 TW (400 fs and 1 J) and was focused with a 15 cm focal length off-axis parabolic mirror to a vacuum spot radius of 6  $\mu\text{m}$  ( $I_{\text{peak}} = 5 \times 10^{18} \text{ W/cm}^2$ ). The gas jet used a supersonic 3 mm diameter nozzle and produced a plasma density of  $1.4 \times 10^{19} \text{ cm}^{-3}$  ( $P_{\text{RSP}} = 1.2 \text{ TW}$ ) in fully ionized helium. The gas jet density profile was approximately a 2 mm flat top with 0.5 mm boundaries.

An electron spectrometer was used to measure the accelerated electron distribution. The spectrometer consisted of an electromagnet placed 10 cm after the plasma acceleration region and a 1/2 inch thick plastic scintillator directly coupled to a photo-multiplier tube (PMT) 15 cm after the magnet. The magnet and scintillator/PMT were aligned with the laser axis. Electrons with energies below a cutoff value, determined by the magnetic field of the electromagnet, were directed away from the laser axis and therefore the scintillator/PMT. This "inline" configuration resulted in measurement of the integrated number of electrons above the cutoff energy. Variation of the magnetic field determined the energy distribution of the accelerated electrons.

The magnet was a 45° sector magnet with a 2.5 mm gap, a field region 5.5 cm long, and a maximum field of 2.5 kG. Two graphite slabs separated by a 2 mm gap were placed over the

input side of the magnet to limit the acceptance of the magnet to a 2 mm by 2.5 mm opening and therefore limit the electrons to a well defined path through the magnetic field. Four inch thick lead shielding was placed after the magnet to limit the acceptance of the scintillator/PMT to electrons deflected between  $0^\circ$  and  $8^\circ$ . Two inch thick graphite was placed over the lead shielding to minimize x-ray production from deflected electrons. The length of the magnetic field region, the magnetic field strength, and the acceptance angle of the scintillator/PMT were used to calculate the energy calibration of the spectrometer. This method results in an energy determination which is accurate to approximately  $-5\%/+25\%$ . The main source of error in the calculated calibration is the omission of the magnet's fringe fields which causes up to a 20% under estimate of the electron energy. The measured electron energies are therefore the minimum electron energy and actual electron energies are likely to be higher. The total relative number of electrons detected at a variety of cutoff energies and for multiple laser shots is shown in Fig. 1. The dashed line represents a signal to noise level of approximately two. Any signal above this level is a definitive electron detection. Electrons up to an energy of 28.5 MeV were clearly observed. The large fluctuations are shot-to-shot fluctuations which are most likely due to the strong non-linearity of the laser-plasma interaction and the electron trapping mechanism. Measurement of the continuous electron energy spectrum from 500 keV to 5 MeV using film showed a smoothly monotonically decreasing electron energy distribution on each laser shot.

Measurement of the peak electron energy allows determination of a lower bound on the electric field of the wake. The laser was observed to be self-guided through a plasma over the full width of the 3 mm gas jet [12]. The acceleration distance is therefore the shorter of the plasma length or the dephasing distance [1],  $L_d \approx \gamma_p^2 2\pi c / \omega_p$ , which is the maximum distance a particle can be accelerated before slipping out of phase from the plasma wave. In our

experiment,  $L_d \approx 640 \text{ } \mu\text{m}$ . The minimum accelerating field necessary to generate the highest energy electrons observed was therefore  $47 \text{ GeV/m}$ .

The absolute number of electrons accelerated above  $1 \text{ MeV}$  was also measured. For this measurement, the spectrometer cutoff energy was set to  $1 \text{ MeV}$  and the scintillator/PMT was replaced with a silicon surface barrier detector (SBD) with a detection area of  $150 \text{ mm}^2$ . The SBD consists of a  $500 \text{ } \mu\text{m}$  thick disk of high purity silicon set between two metallic plates which are biased at  $200 \text{ volts}$ . High energy particles traveling through the silicon excited one electron-hole pair for every  $3.6 \text{ eV}$  of energy deposited in the silicon. Each electron incident on the SBD ( $1\text{-}30 \text{ MeV}$ ) passed completely through the SBD and deposited approximately  $400 \text{ keV}$  of energy, *i.e.*, created  $1.1 \times 10^5$  electron-hole pairs. The maximum number of electron-hole pairs created was measured to be  $1 \times 10^{11}$ . The number of electrons passing through the SBD was therefore approximately  $10^6$ .

The number of electrons measured by the SBD is only a small fraction of the electrons accelerated above  $1 \text{ MeV}$  due to the small acceptance angle of the magnet. In order to determine the fraction of electrons entering the magnet, the beam profile was measured using Kodak DEF x-ray film. The film was shielded with two layers of  $50 \text{ } \mu\text{m}$  thick aluminum foil and a  $250 \text{ } \mu\text{m}$  thick lead sheet to block electrons below  $1 \text{ MeV}$  and stray light. Sixteen shots were fired to expose the film. A control piece of film with only two layers of aluminum foil was placed next to the beam profile measurement film, but out of the direction of laser propagation, to assure that any film exposure was not due to stray x-rays. No exposure of the control piece of film was observed. The beam profile showed a circular electron distribution centered on the laser axis with a cone angle approximately one-half the cone angle of the laser. Comparing the electron beam profile with the acceptance angle of the magnet showed that only  $1\%$  of the electrons were

detected with the SBD. The total number of electrons accelerated above 1 MeV was therefore approximately  $10^8$ .

The laser-plasma interaction was investigated by examining the SRS light generated during wakefield production which consequentially is related to the wakefield amplitude. For large amplitude plasma waves, non-linear steepening results in harmonics ( $\omega_0 \pm n\omega_p$ ) of the standard SRS spectrum ( $\omega_0 \pm \omega_p$ ) [13]. SRS light was examined by placing a lens with an acceptance angle of  $\pm 10^\circ$  at  $0^\circ$ ,  $20^\circ$ ,  $30^\circ$ ,  $40^\circ$ ,  $60^\circ$ , and  $90^\circ$  to the laser axis to image anti-Stokes light into a 0.25 m spectrometer. The spectrometer measured the scattered spectrum from approximately 700 nm to 1000 nm which allowed the first four harmonics of the anti-Stokes line to be measured on each laser shot. The anti-Stokes spectra from  $0$ - $60^\circ$  were qualitatively similar with multiple orders and no broadening of the anti-Stokes peaks apparent. No anti-Stokes signal was observed at  $90^\circ$ . The angle of  $40^\circ$  was found empirically to provide the highest signal-to-noise ratio measurement of the SRS light and therefore the wakefield amplitude. Fig. 2 shows a typical spectrum at  $40^\circ$  where up to the 4<sup>th</sup> harmonic is visible. The 5<sup>th</sup> harmonic was also measured on many shots by lowering the central wavelength of the spectrometer. The large angular spread of the anti-Stokes light is most likely due to the highly 3-dimensional nature of the wakefield due to the tight focusing of the laser pulse (focal spot size  $\sim$  plasma wavelength) [14,15]. The multiple orders of SRS observed and their comparable intensities indicates that a highly non-linear, large amplitude plasma wave was present. The non-linearity of the plasma wave was correlated with the high energy electron production (see Fig. 2 inset), where the intensity of the 2<sup>nd</sup> harmonic exhibited a strong correlation with the number of accelerated electrons. In no instance during the experiment was any broadening of the scattered peaks observed. For example, the width of the 1<sup>st</sup> harmonic shown in Fig. 2, when the plasma wave

was highly non-linear, remained the same at lower laser powers when the plasma wave remained linear. This indicates that the plasma waves were highly coherent with no evidence of wave breaking. Large shot-to-shot fluctuations were observed in the SRS spectrum concurrent with energetic electron production. The SRS spectrum and electron production fluctuations did not correlate with laser power, gas jet density, or any other directly controllable experimental parameter, except that for very low laser power ( $< 1 \text{ TW}$ ) or low plasma density ( $< 10^{19} \text{ cm}^{-3}$ ), high energy electrons were never produced.

The generation of high energy electrons in this experiment without evidence for wave breaking strongly suggests that electrons are pre-accelerated prior to being trapped by the wakefield. Previous experiments on our system have shown that approximately 10% of the incident laser pulse is reflected by backward Raman scattering (BRS) [16]. One candidate for pre-accelerating electrons is the low phase velocity waves generated in BRS [17]. BRS produces backward traveling light of frequency  $\omega_0 - \Delta\omega$ , where  $\omega_0 \gg \Delta\omega \geq \omega_p$ . The BRS light wave can beat with the main laser pulse to generate a low phase velocity,  $v_{pb} = c\beta_{pb} \approx (\Delta\omega/2\omega_0)c$ , forward traveling beat wave. At high laser intensities, BRS occurs in the strong-pump limit, and the effects of the space-charge wave can be neglected [18]. The low phase velocity beat wave can pick up some of the low energy electrons in the background plasma and accelerate them to sufficient energies so as to be trapped by the high phase velocity wakefield ( $v_p \approx c$ ). These trapped electrons can then be accelerated to much higher energies by the wakefield.

A 1-D numerical simulation of this two stage acceleration mechanism shows the qualitative behavior observed in the experiment. The simulation prescribes three analytical wave potentials (normalized to  $mc^2/e$ ) corresponding to the primary laser pulse  $a_0$ , the wakefield plasma wave  $\phi$ , and the BRS electromagnetic wave  $a_1$ , and then pushes test particles in these



potentials. The simulation uses the coordinates  $\zeta = z - ct$  and  $\tau = t$ , the potentials are initialized in the region  $\zeta \leq 0$  ( $\zeta = 0$  corresponds to the initial front of the laser pulse), and the particles are initialized at rest in the region  $\zeta > 0$ .

The laser pulse parameters used in the simulation were chosen to closely model the experimental laser pulse parameters — peak normalized amplitude  $a_{om} = 1.4$ , wavelength  $\lambda = 1 \mu\text{m}$ , and normalized frequency  $\omega_0/\omega_p = 8.5$ . The BRS is assumed to saturate at a normalized amplitude of  $a_{1m} = 0.033$ , based on analytical estimates for saturation in the strong-pump regime [18]. All potentials have a characteristic rise length of  $\tau_r = 25/\omega_p$ . Fig. 3 plots the normalized axial momentum,  $u_z = \gamma\beta_z = p_z/mc$ , of simulation electrons at a wakefield potential of  $\phi_0 = 0.6$  as a function of the coordinate  $\zeta$  after 250  $\mu\text{m}$  of propagation. This demonstrates the initial trapping of particles in the combined wake and BRS fields.

Production of energetic electrons is seen in the simulations only when the wakefield  $\phi_0$  and BRS  $a_1$  amplitudes are sufficiently large. Fig. 4 plots the peak electron energy,  $W_{\text{max}}$ , and percentage,  $f_{\text{tr}}$ , of plasma electrons which are trapped and accelerated to energies exceeding 10 MeV as a function of  $\phi_0$  after propagating 2.5 mm (other parameters are as in Fig. 3). The threshold for trapping is at  $\phi_0 = 0.55$ , beyond which  $f_{\text{tr}}$  rapidly increases. Once trapping occurs,  $W_{\text{max}}$  corresponds to the detuning limit, *i.e.*,  $W_{\text{max}} \approx 4\gamma_p^2\phi_0 mc^2$ . This is in qualitative agreement with the strong correlation of wakefield amplitude to high energy electron production observed in the experiments (see Fig. 2 inset).

An estimate for the trapping threshold can be obtained by requiring that the wakefield separatrix overlap the beat wave separatrix [1,19]. In momentum phase space ( $u_z$  versus  $z-v_pt$ ), the minimum of the wakefield separatrix is given by  $u_{w,\text{min}} \approx \gamma_\perp^2/4\phi_0 - \phi_0$ , assuming

$2\phi_0\gamma_p/\gamma_\perp \gg 1$  where  $\gamma_\perp = \sqrt{1+a_0^2}$ . Likewise, the maximum of the beat wave separatrix is given by  $u_{b,\max} \approx \beta_{pb}\gamma_\perp + 2\sqrt{a_0a_1}$ . Passing of electrons from the slow beat wave to the fast wakefield can occur when  $u_{b,\max} \geq u_{w,\min}$ , *i.e.*,  $\phi_0 \geq (\gamma_\perp - u_{b,\max})/2$ . This condition gives  $\phi_0 \geq 0.6$  for the parameters of Fig. 3 ( $\beta_{pb} = 0.059$ ,  $a_0 = 1.4$ , and  $a_1 = 0.033$ ). A more accurate calculation gives a trapping threshold of  $\phi_0 \geq 0.54$ , in excellent agreement with the simulation results. Hence, self-trapping of plasma electrons can occur when  $\phi_0 < 1$ , *i.e.*, well below the theoretical wave breaking amplitude of  $\phi_0 = E_{WB}/E_0 \approx 4$ .

In conclusion, we have observed very high energy electrons (up to 30 MeV) accelerated in a SM-LWFA at relatively low laser power (2.5 TW). Optical diagnostics show the existence of highly nonlinear, large amplitude plasma waves. Using the dephasing distance as the acceleration length, the acceleration gradient is estimated to be greater than 47 GeV/m. The high energy electrons are observed with no sign of wave breaking. Numerical simulations show that low phase velocity beat waves generated by BRS can pre-accelerate background plasma electrons to sufficient energy to be trapped by the high phase velocity wakefield. Both the experiment and the simulation show that the trapping and acceleration of electrons in the SM-LWFA is a highly non-linear process strongly dependent on the wakefield amplitude.

The authors would like to thank M. Baine, K. Evans, and L. Daniels for technical assistance. This work was supported by the Department of Energy and the Office of Naval Research.

#### REFERENCES:

- 1 E. Esarey, P. Sprangle, J. Krall, and A. Ting, *IEEE Trans. Plasma Sci.* **24**, 252 (1996)
- 2 J.A. Edighoffer and R.H. Pantell, *J. Appl. Phys.* **50**, 6120 (1979); E. Esarey, P. Sprangle, and J. Krall, *Phys. Rev. E* **52**, 5443 (1995); Y.C. Huang and R.L. Byer, *Appl. Phys. Lett.* **69**, 2175

- (1996); B. Hafizi, A. Ting, E. Esarey, and P. Sprangle, *Phys. Rev. E* **55**, 5924 (1997)
- 3 T. Tajima and J.M. Dawson, *Phys. Rev. Lett.* **43**, 267 (1979)
  - 4 C. Clayton *et al.*, *Phys. Rev. Lett.* **70**, 37 (1993); F. Amiranoff *et al.*, *IEEE Trans. Pl. Sc.* **24**, 296 (1996)
  - 5 P. Sprangle E. Esarey, A. Ting, and G. Joyce, *Appl. Phys. Lett.* **53**, 2146 (1988)
  - 6 P. Sprangle, E. Esarey, J. Krall, and G. Joyce, *Phys. Rev. Lett.* **69**, 2200 (1992); J. Krall, A. Ting, E. Esarey, P. Sprangle, and G. Joyce, *Phys. Rev. E* **48**, 2157 (1993)
  - 7 K. Nakajima *et al.*, *Phys. Rev. Lett.* **74**, 4428 (1995); C. Coverdale *et al.*, *Phys. Rev. Lett.* **74**, 4659 (1995); D. Umstadter *et al.*, *Science* **273**, 472 (1996)
  - 8 A. Modena *et al.*, *Nature* **337**, 606 (1996); C.E. Clayton *et al.*, *Bull. Amer. Phys. Soc.* **41**, 1465 (1996)
  - 9 A. Ting, K. Krushelnick, C.I. Moore, H.R. Burris, E. Esarey, J. Krall, and P. Sprangle, *Phys. Rev. Lett.* **77**, 5377 (1996); S.P. LeBlanc *et al.*, *Phys. Rev. Lett.* **77**, 5381 (1996)
  - 10 E. Esarey, J. Krall, and P. Sprangle, *Phys. Rev. Lett.* **72**, 2887 (1994); W.B. Mori *et al.*, *Phys. Rev. Lett.* **72**, 1482 (1994); N.E. Andreev *et al.*, *Phys. Plasmas* **2**, 2573 (1995)
  - 11 A.I. Akhiezer and R.V. Polovin, *Zh. Eksp. Teor. Fiz.* **30**, 915 (1956) [*Sov. Phys. JETP* **3**, 696 (1956)]
  - 12 K. Krushelnick, A. Ting, C.I. Moore, H.R. Burris, E. Esarey, P. Sprangle, and M. Baine, *Phys. Rev. Lett.* **78**, 4047 (1997)
  - 13 D. Umstadter, *et al.*, *Phys. Rev. Lett.* **59**, 292 (1987)
  - 14 J.R. Marques *et al.*, *Phys. Rev. Lett.* **76**, 3566 (1996)
  - 15 K. Krushelnick *et al.*, submitted to *Phys. Rev. E* (1997)
  - 16 A. Ting , K. Krushelnick, H.R. Burris, A. Fisher, C. Manka, and C.I. Moore, *Opt. Lett.* **21**, 1096 (1996)
  - 17 P. Bertrand *et al.*, *Phys. Rev. E* **49**, 5656 (1994)
  - 18 E. Esarey and P. Sprangle, *Phys. Rev. A* **45**, 5872 (1992); G. Shvets *et al.*, *Phys. Plasmas* **4**, 1872 (1997)
  - 19 E. Esarey *et al.*, unpublished

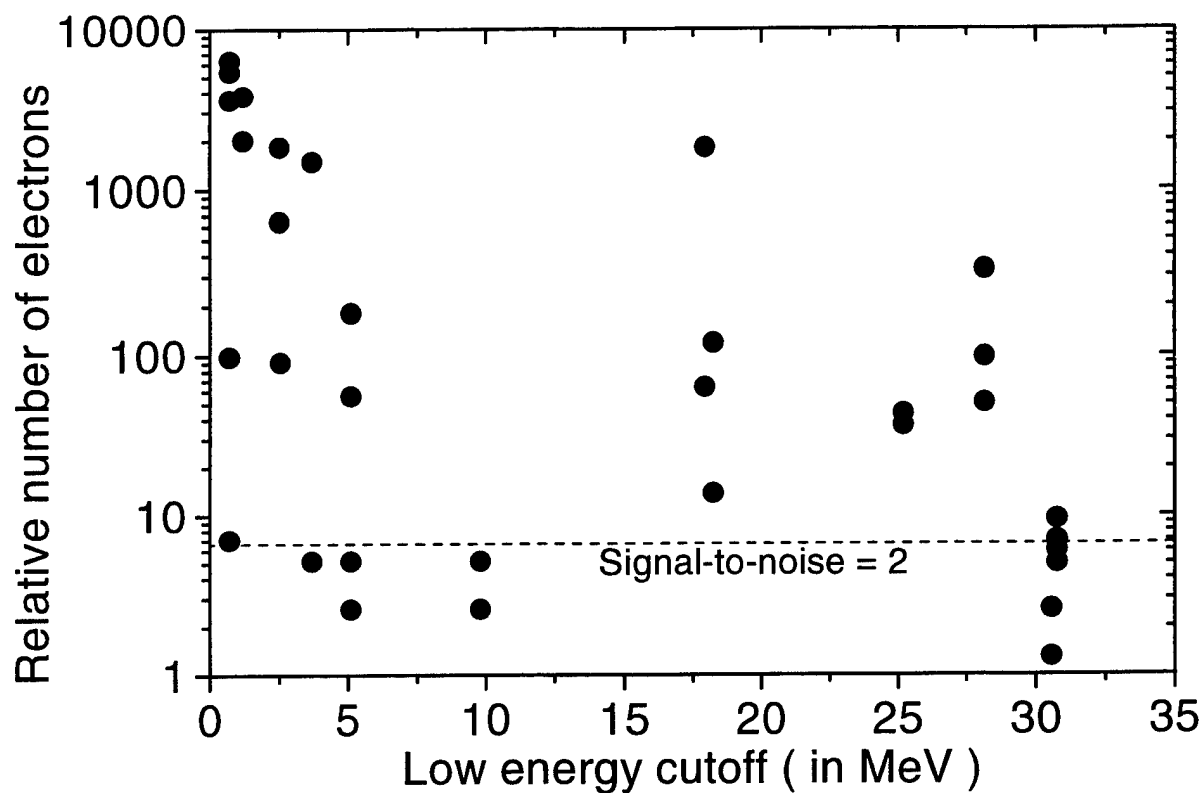


Fig. 1 : Electron energy distribution measured with the scintillator and PMT. The dashed line represents a signal to noise level of approximately two. Any signal above this level is a clearly discernible electron peak.

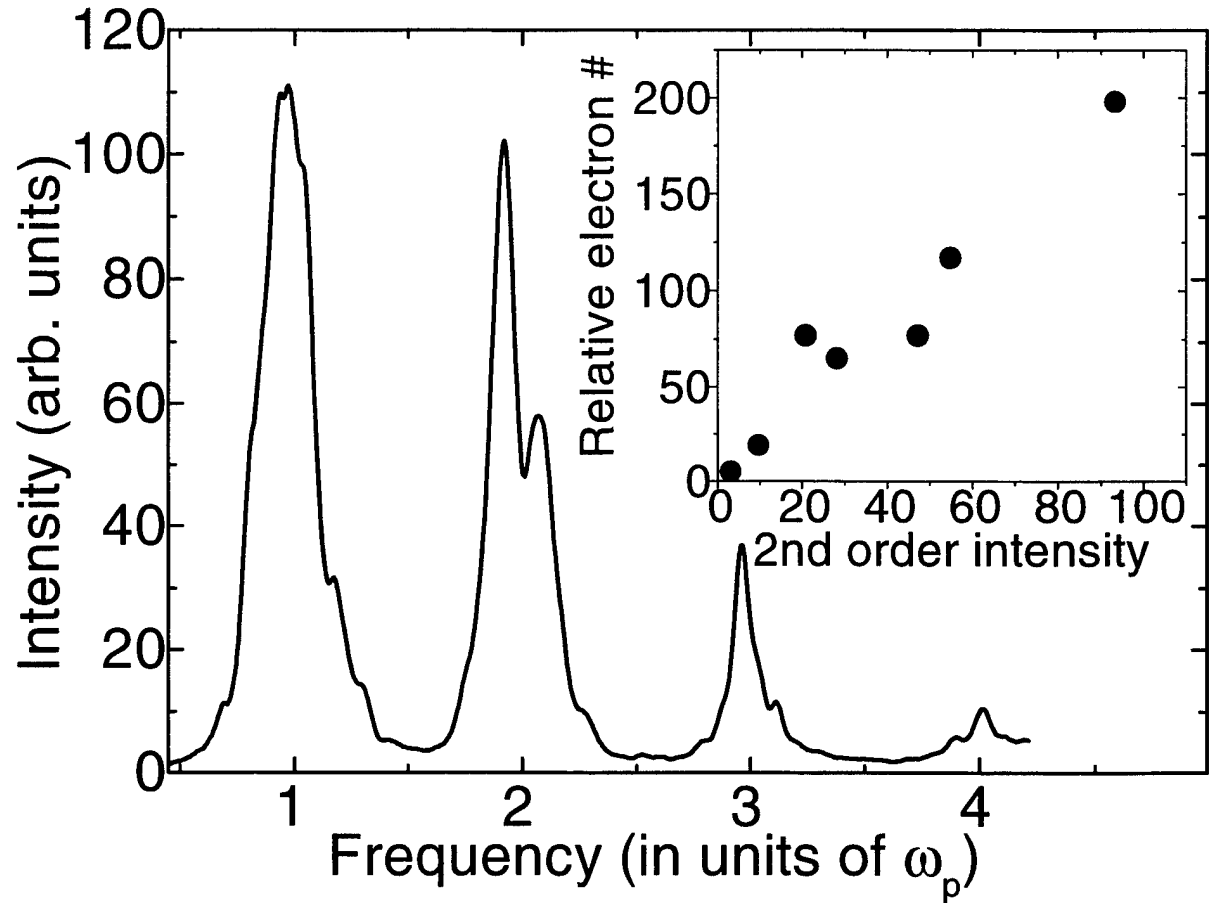


Fig. 2 : The multiple order anti-Stokes spectrum. The well defined peaks show a highly nonlinear and coherent plasma wave with no evidence of wave breaking. The inset shows the relationship between the 2<sup>nd</sup> harmonic intensity and the number of electrons accelerated above 1 MeV.

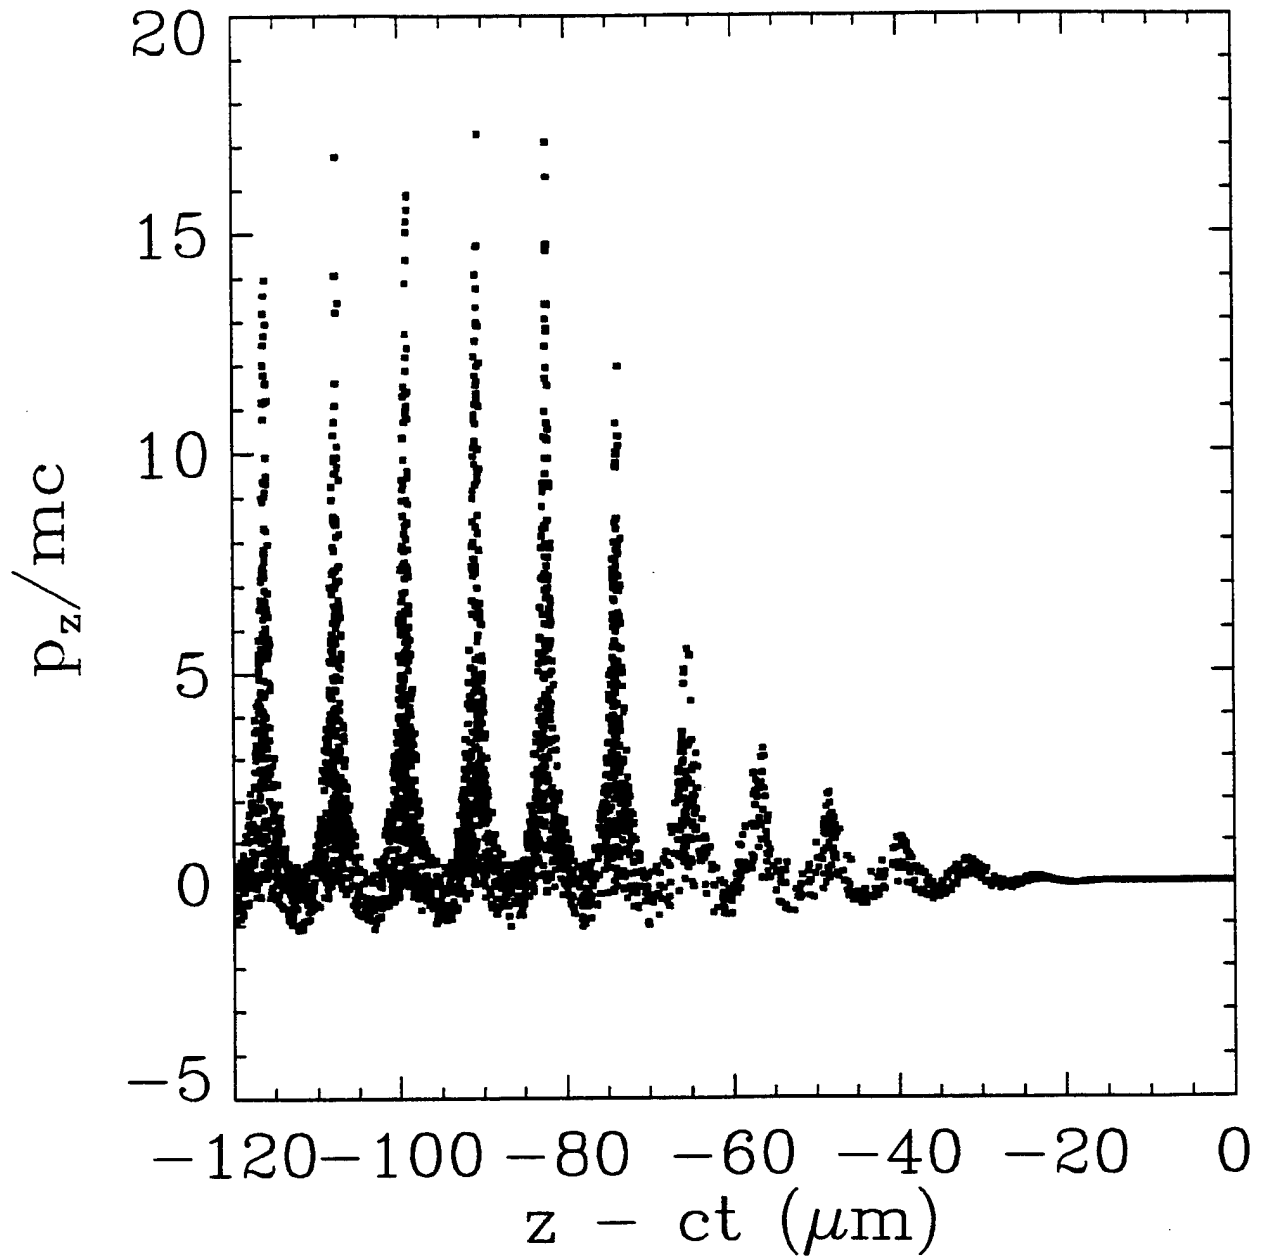


Fig. 3 : Momentum phase space plot of the test electrons in the simulation after propagating  $c\tau=250 \mu\text{m}$  with  $a_0=1.4$ ,  $a_1=0.033$ ,  $\phi_0=0.6$ , and  $\omega_0/\omega_p=8.5$ . The laser pulse resides in the region  $z - ct < 0$  and propagates to the right.

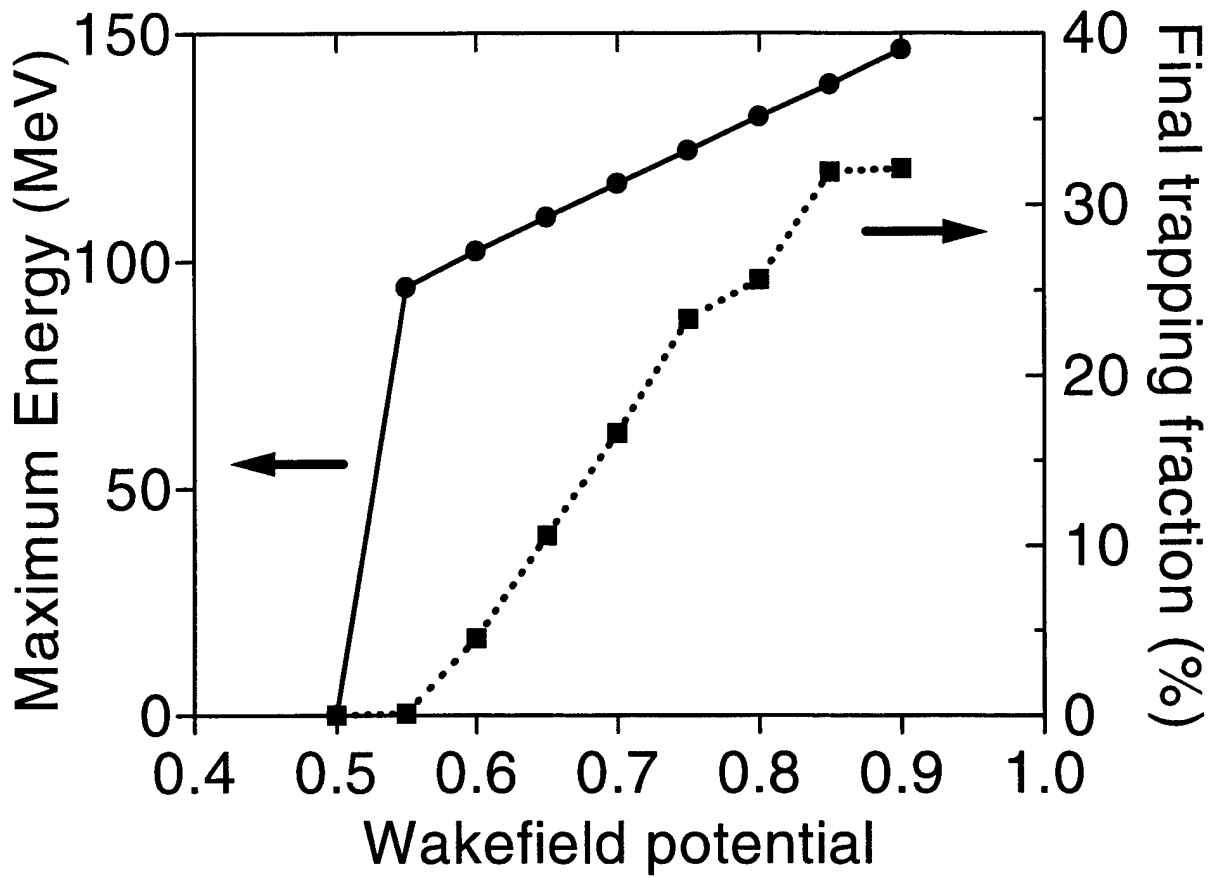


Fig. 4 : Simulation results showing the maximum energy (solid line) and fraction above 10 MeV (dashed line) of accelerated electrons as a function of the wakefield potential  $\phi_0$  at  $c\tau=2.5$  mm for the parameters of Fig. 3. The y-axis is in units of MeV for the energy and the percentage for the fraction.